




Bay State Surface Technologies, Inc.

Headquarters: 201 Washington St. Auburn, MA 01501
Toll-Free 1-800-772-0104 Fax (508) 832-5043
Factory: 50 Howe Ave., Bldg P, Millbury, MA 01527
Tel. (508) 832-5035 Fax (508) 865-1528
Internet: www.aimtek.com/baystate

TM-600 TRAVERSE MACHINE TECHNICAL SPECIFICATIONS

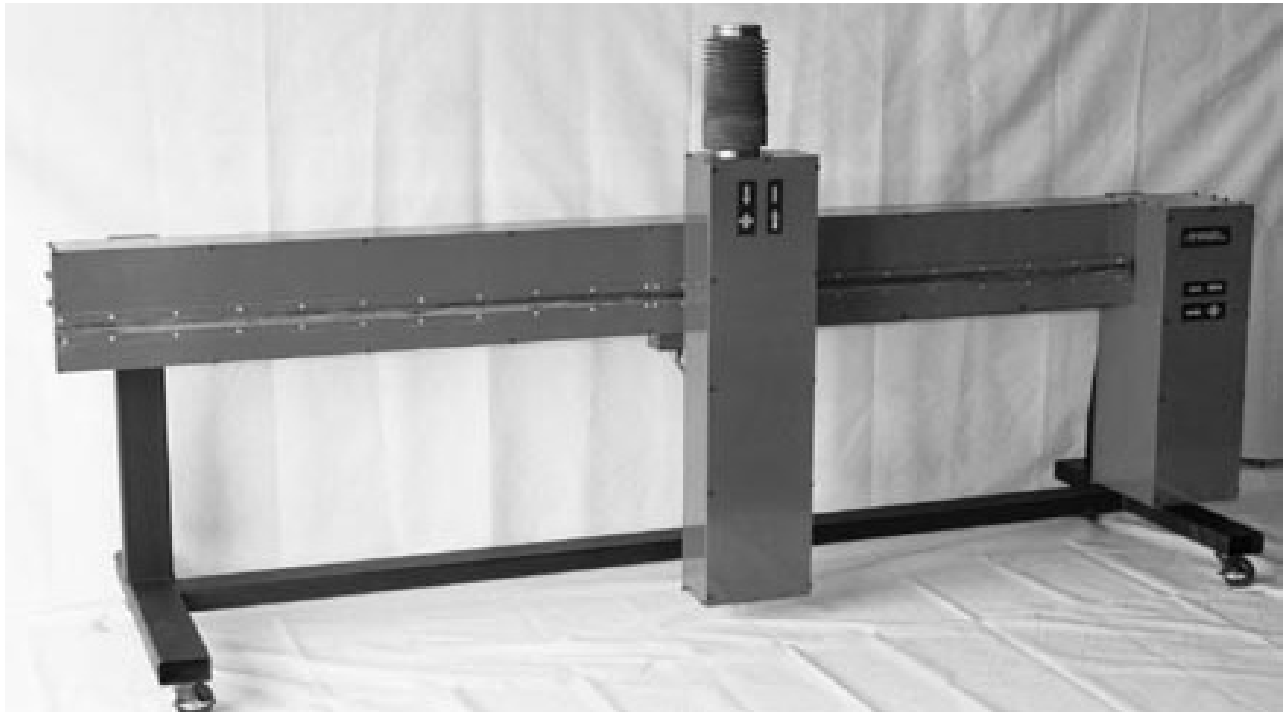

FEATURES

The TM-600 Traverse Machine is designed with a 60 inch horizontal stroke and a 30 inch vertical stroke. Both axes can be operated simultaneously. With digital programming of simple operation commands by keypad inputs, the program can be running within minutes. The unit is capable of retaining up to 200 programs and each program can be called from any other program. This allows the operator to set up for production operation faster. The unit has eight built-in inputs and outputs for interface with external devices and has travel speeds of up to 600 inches per minute in the horizontal axis, and 300 inches per minute in the vertical Axis. A stroke counter can be added to allow the operator to monitor the number of passes. The positioning of both axes is displayed on the keypad. Both axes can be operated in the slow or fast jog modes for ease of actual positioning. Roll about, locking casters allow the unit to be moved and locked in place when needed.



TECHNICAL SPECIFICATIONS
TM-600 TRAVERSE MACHINE

TECHNICAL DATA

Horizontal stroke 60”

Vertical stroke 30”

Horizontal speed 0.1 to 600 inches / min.

Vertical speed 0.1 to 300 inches / min.

**Horizontal / Vertical
positioning accuracy
to three places: ± 0.001**

Weight 400 lbs.

ELECTRICAL DATA

115 VAC 60 CYCLES 20 AMPS.



TM-600E CONTROL CONSOLE